

### **DESCRIPTION**

This document illustrates how to replace the Power Board for model 561.



#### **TOOLS NEEDED**

- #2 Phillips Screwdriver (Stubby Recommended)
- Pliers




#### PARTS INCLUDED

• (1) 0027380 - Power Board




UNPLUG UNIT FROM OUTLET AND ALLOW TO COOL

1 Remove the grill and clean out tray from the unit. Flip the unit over and remove (8) screws from the bottom panel.

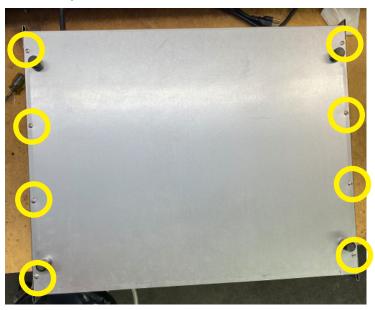

Remove (3) screws from the rear of the unit. Remove the bottom panel.

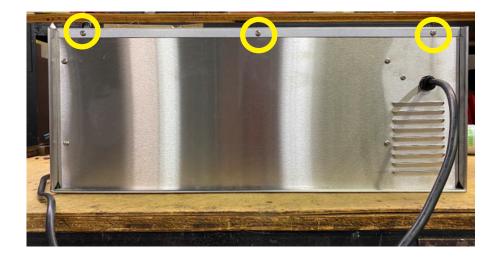



# WISCO INDUSTRIES, INC. PHONE: 608.835.3106 • TOLL FREE: 800.999.4726 • FAX: 608.835.7399 • www.wiscoind.com

- Remove (4) screws that hold the power board mount to the outer housing of the unit.

4 Using the pliers, remove (4) wire clips that are connected to the power board. (*Note:* For convenience during reassembly, mark the location of these wires.)





## MODEL(S) 561/561A POWER BOARD REPLACEMENT 0027380SK

- **5** Unplug the fan from the board.
- 6 Remove (4) screws that connect the power board to the mount.





Using the new board, complete all steps in reverse order and you have successfully replaced your units power board. Your unit is now ready for operation.

