



WISCO INDUSTRIES, INC.

PHONE: 608.835.3106 • TOLL FREE : 800.999.4726 • FAX: 608.835.7399 • www.wiscoind.com

MODEL 791/891
HEATING ELEMENT REPLACEMENT
0027199SK


DESCRIPTION:

This document illustrates how to replace the Heating Element in your Model 791 or 891.



TOOLS NEEDED

- #2 Phillips Screwdriver
- 7mm Wrench or 7mm Socket & Ratchet

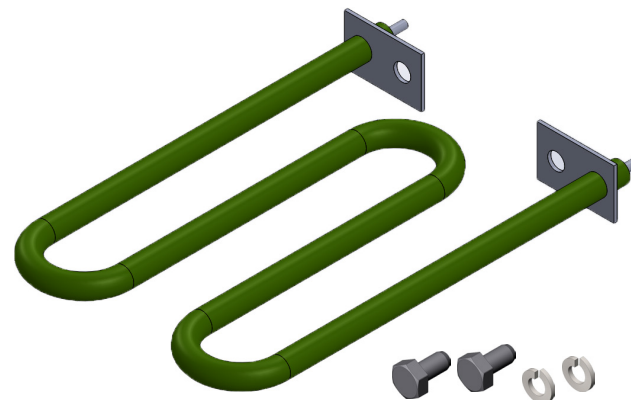

PARTS INCLUDED

- (1) 0027199 - HEATING ELEMENT
- (2) 0027763 - M4 X 8MM HEX BOLT
- (2) 0022931 - M4 SPRING LOCK WASHER

Please review this document thoroughly before beginning repairs. Wisco recommends using qualified local service agents. Wisco does not have authorized service agents.




WISCO INDUSTRIES, INC.

PHONE: 608.835.3106 • TOLL FREE : 800.999.4726 • FAX: 608.835.7399 • www.wiscoind.com

MODEL 791/891
HEATING ELEMENT REPLACEMENT
0027199SK




UNPLUG UNIT FROM OUTLET AND ALLOW TO COOL

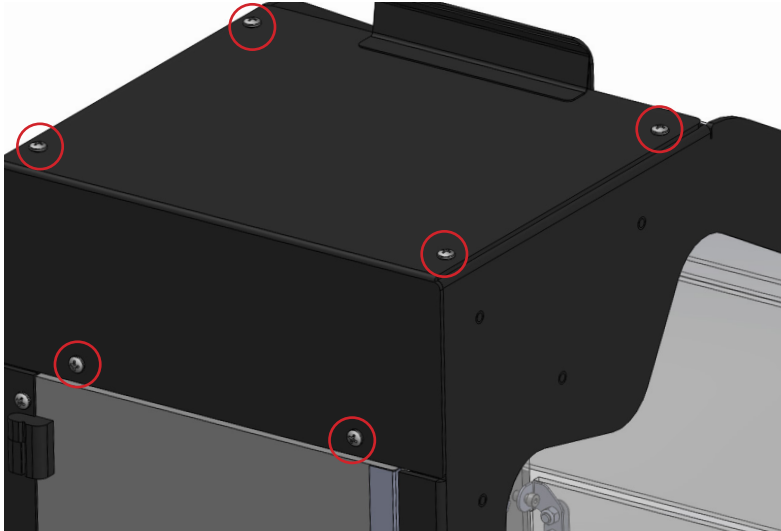

1.) Remove top four screws & back two screws.

Note: For model 891, you will need to remove (3) screws from the back of the unit.

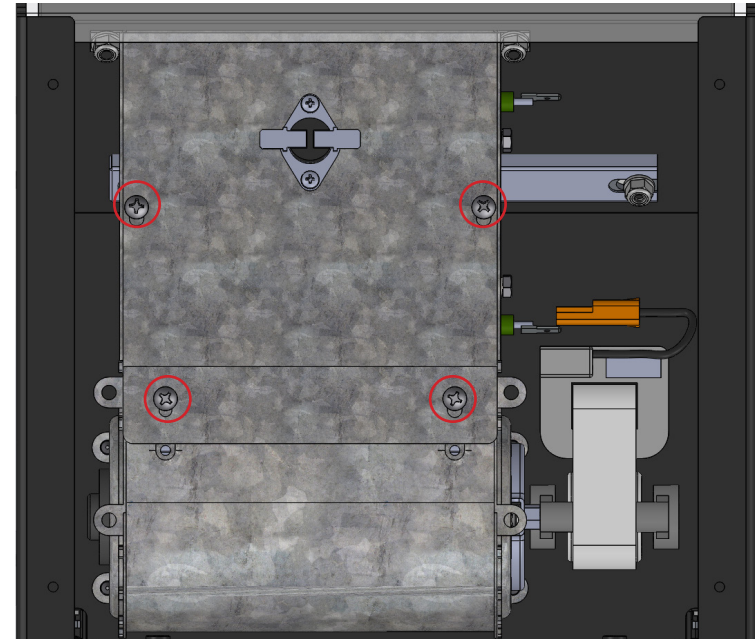

2.) Disconnect wires from the Heating Element.


3.) Remove screws & cover.



WISCO INDUSTRIES, INC.

PHONE: 608.835.3106 • TOLL FREE : 800.999.4726 • FAX: 608.835.7399 • www.wiscoind.com

MODEL 791/891
HEATING ELEMENT REPLACEMENT
0027199SK

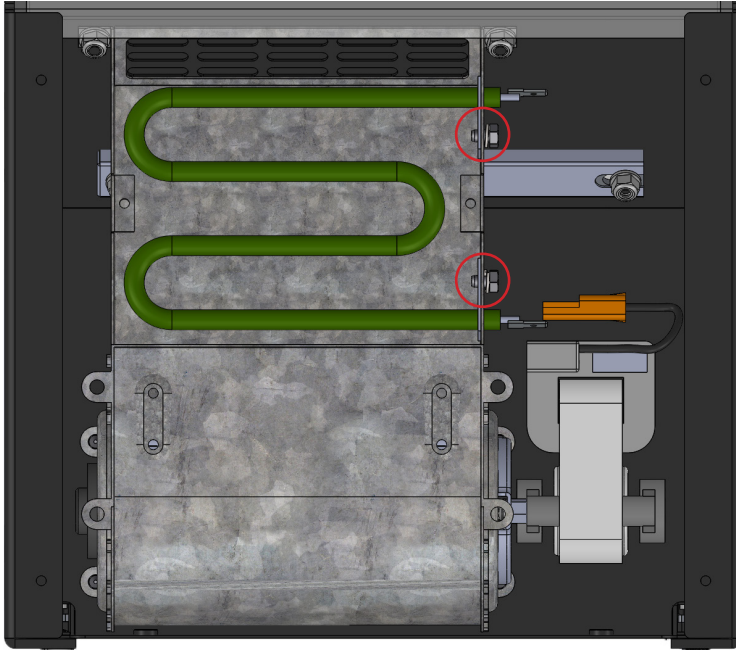

4.) Remove the two bolts holding the Heating Element to the Duct. * Note: Your unit may have a 5mm nut and bolt. If so, use 8mm Wrench or Socket to remove.

5.) Remove the Heating Element & replace with new one.

6.) Assemble unit in reverse order.

7.) Unit is now ready for operation.