



WISCO INDUSTRIES, INC.

PHONE: 608.835.3106 • TOLL FREE: 800.999.4726 • FAX: 608.835.7399 • www.wiscoind.com

MODEL 520
HEATING ELEMENT REPLACEMENT
0022824SK


DESCRIPTION

This document illustrates how to replace the Heating Element for model 520.



TOOLS NEEDED

- #2 Phillips Screwdriver
- Small, Flathead Screwdriver
- Pliers

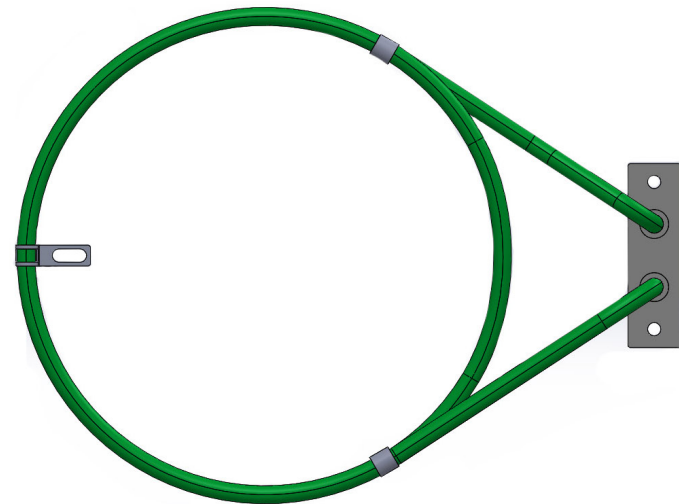

PARTS INCLUDED

- (1) 0022841 - Regulating Thermostat



WISCO INDUSTRIES, INC.

PHONE: 608.835.3106 • TOLL FREE: 800.999.4726 • FAX: 608.835.7399 • www.wiscoind.com

MODEL 520
HEATING ELEMENT REPLACEMENT
0022824SK



UNPLUG UNIT FROM OUTLET AND ALLOW TO COOL

- 1** Remove oven door by opening the door all the way, lifting up to separate from latches, and pull out



- 2** Remove support rack from the inside of the oven by lifting the rack up, and pulling it out from the latches that hold it in place. (For better assistance on how the latches are laid out, see the photo)



- 3** Remove (3) panel screws from inside of the oven. Once completed, flip the unit over.






WISCO INDUSTRIES, INC.


PHONE: 608.835.3106 • TOLL FREE: 800.999.4726 • FAX: 608.835.7399 • www.wiscoind.com

MODEL 520
HEATING ELEMENT REPLACEMENT
0022824SK


- 4** Remove (20) screws from the bottom of the oven & (4) screws from the back of the oven (located by the arrows). Once completed, remove the bottom of the oven.

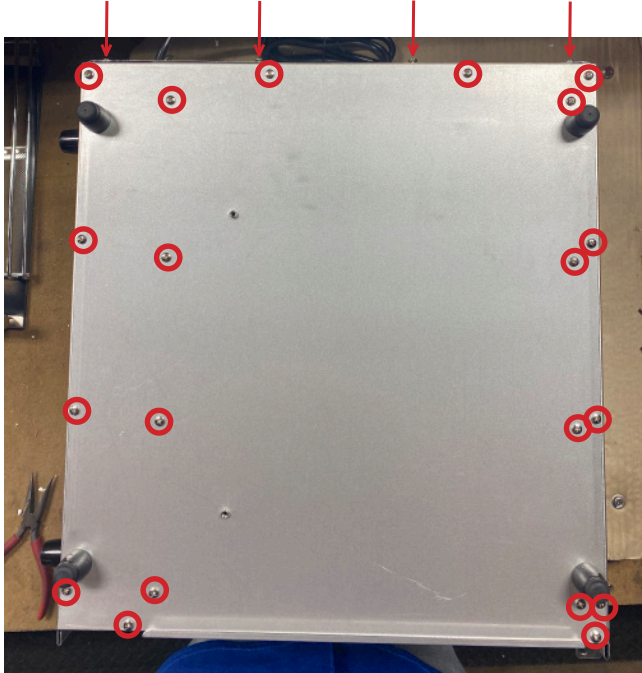

- 5** Remove (2) screws that attach the vent to the oven; remove the vent.

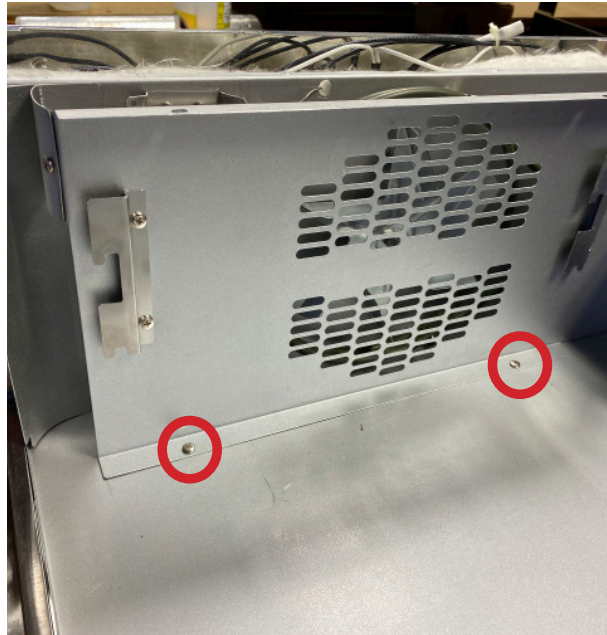

- 6** Remove (2) screws connected to the base of the heating element.

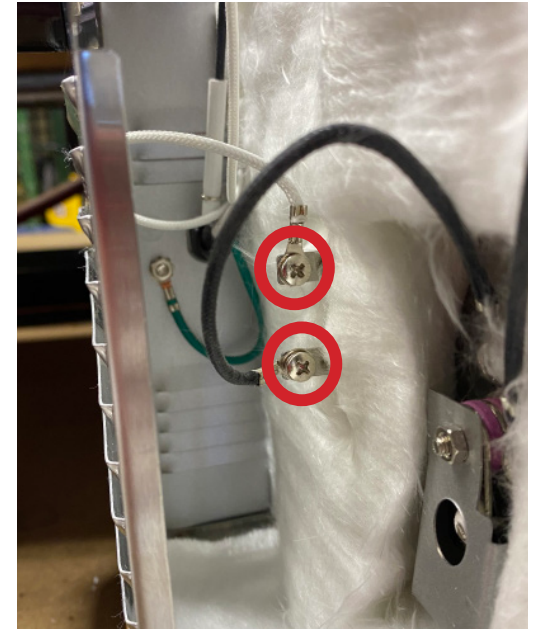





WISCO INDUSTRIES, INC.

PHONE : 608.835.3106 • TOLL FREE : 800.999.4726 • FAX : 608.835.7399 • www.wiscoind.com

MODEL 520
HEATING ELEMENT REPLACEMENT
0022824SK

- 7** Remove (2) nuts and (3) screws holding the heating element in place; remove the heating element.

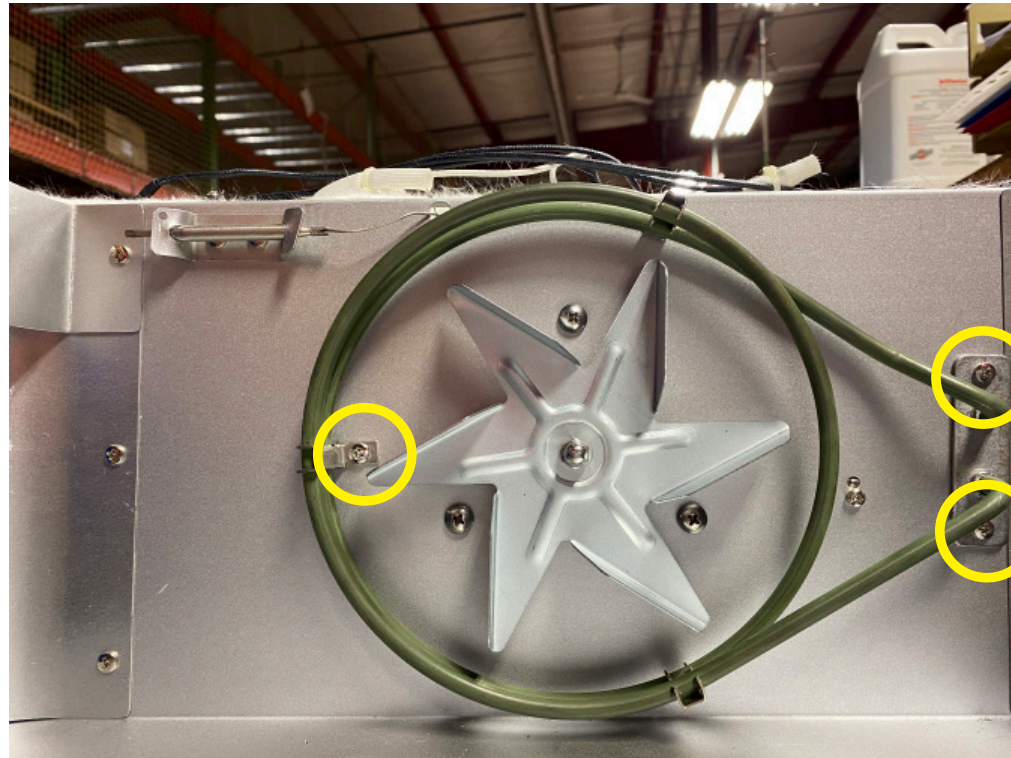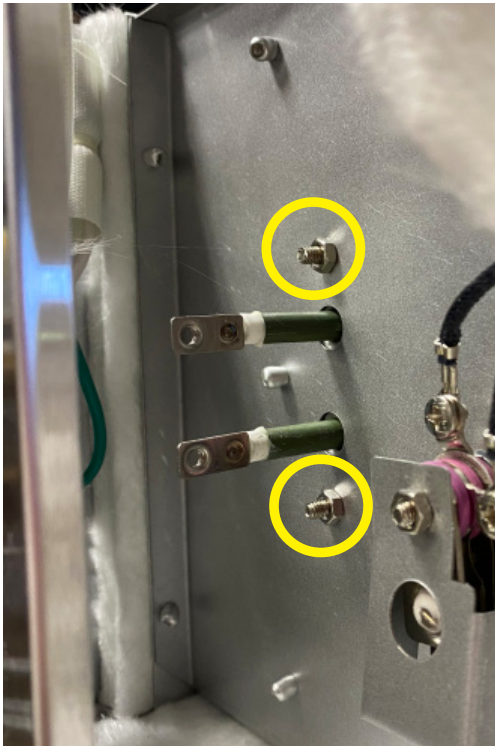

- 8** Using the new element, complete all steps in reverse order and you have successfully replaced your units heating element. Your unit is now ready for operation.